


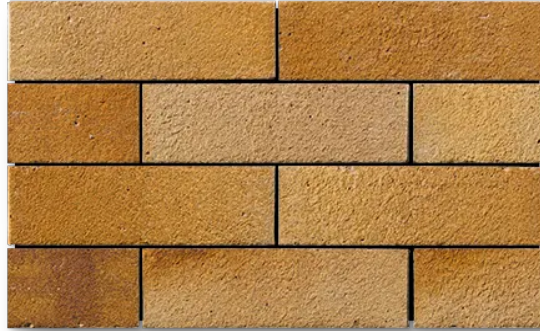

## Product Information

|                        |                  |
|------------------------|------------------|
| Ibstock Code:          | A0619A           |
| Type:                  | Wirecut Extruded |
| Facing Description:    | Rolled           |
| Dry Brick Weight (kg): | 2.2kg            |
| Pack Quantity:         | 500              |
| Packaging (standard):  | Banded (Plastic) |
| Factory:               | Cattybrook       |
| EPD:                   |                  |

## Technical Specification (to BS EN 771-1)

|                                                                     |                       |
|---------------------------------------------------------------------|-----------------------|
| Brick Dimensions (L x W x H mm):                                    | 215x102x65            |
| Size Tolerances Mean & Range:                                       | T2 R1                 |
| Configuration:                                                      | Vertically Perforated |
| Voids (%):                                                          | 25-30%                |
| Compressive Strength (N/mm <sup>2</sup> ):                          | 50                    |
| Active Soluble Salts:                                               | S2                    |
| Water Absorption (% weight):                                        | 12                    |
| Durability:                                                         | F2                    |
| Gross Dry Density (Sound Insulation) (Kg/m <sup>3</sup> ):          | 1520                  |
| Equivalent Thermal Conductivity "K" value 5% Exposed:               | 1.09                  |
| Initial Rate of Absorption (Suction Rate) (Kg/m <sup>2</sup> /min): | 1                     |
| EAN:                                                                | 5.03634E+12           |