
## Hardwicke Oakham Blend



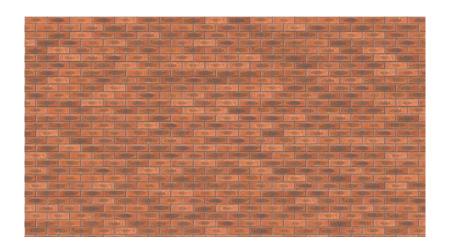

## **Product Information**

Ibstock Code: A2478A

Type: Wirecut Extruded

Facing Description: Rolled
Dry Brick Weight (kg): 1.9kg
Pack Quantity: 475

Packaging (standard): Banded (Plastic) and Stretchwrap

Factory: Dorket Head

EPD:

## Technical Specification (to BS EN 771-1)

Brick Dimensions (L x W x H mm): 215x102x65

Size Tolerances Mean & Range: T2 R1

Configuration: Vertically Perforated

Voids (%):

Compressive Strength (N/mm²):

Active Soluble Salts:

S2

Water Absorption (% weight): 16
Durability: F2

Gross Dry Density (Sound Insulation) (Kg/m³): 1390 Equivalent Thermal Conductivity "K" value 5% Ex- 0.91

posed:

Initial Rate of Absorption (Suction Rate) (Kg/m²/min): 1.1

EAN: 5.03634E+12